



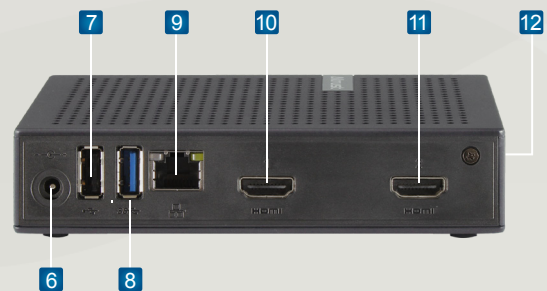

Thin Client Atrust t76L

Der Atrust t76L ist ein Linux-basierter Thin Client, welcher speziell für eine Client/Server Computing bzw. VDI-Umgebung entwickelt wurde. Die von Atrust entwickelte ACS (Atrust Client Setup) Software ist ebenfalls integriert, um ein schnelles Roll-Out zu ermöglichen. Über den ADM wird der t76L effektiv verwaltet. Mit dem Support von Citrix® ICA/HDX™, Microsoft® RDP™ mit RemoteFX™ und VMware® Horizon View™, kann der t76L genutzt werden, um virtuelle und Session-based Desktop Verbindungen für verschiedenste Remote Desktop fähige Betriebssysteme bereitzustellen. t76L bietet eine reiche Palette von technischen Möglichkeiten, damit sich Programme wie auf einem PC verhalten, einschließlich Multimedia Inhalte.

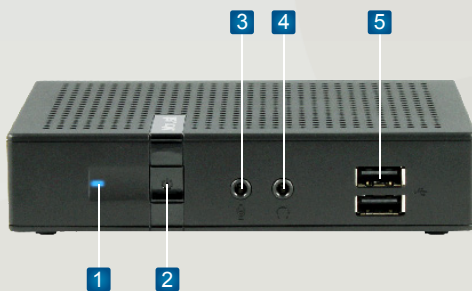

1 Power LED
Zeigt den Betriebsstatus. 2

2 Power Button
Ein- und Ausschalter . 3

3 Microphone Port
Anschluss für Microfone.

4 Headphone Port
Anschluss für Kopfhörer oder externe Lautsprecher.

5 USB 2.0 Port x 2
Connects to a USB device.

6 DC IN
Anschluss für den AC Adapter.

7 USB 2.0 Port
Connects to a USB device.

8 USB 3.2 Gen 1 Port
Connects to a USB device.

9 LAN Port
Connects to a host server through a LAN switch.

10 HDMI Port 1
Connects to a monitor.

11 HDMI Port 2
Connects to a monitor.

12 Kensington Lock Slot
Attach the t76L to a permanent object with the Kensington slot and a security cable.

Atrust t76L Features

▶ **Low total cost of ownership**

Additional computing access is as simple as adding more I/O devices. The total cost of ownership is then drastically reduced.

▶ **Slim and quiet design**

The slim design allows it to be mounted to the back of a monitor with a VESA mount. Together with its fanless design, t76L helps create a simple and noiseless workplace environment.

▶ **Simple click and play**

t76L connects to the host server with a Remote Desktop connection. Just click the shortcut for a Remote Desktop session, you can immediately start a session and enjoy the computing resources.

▶ **Rich remote user experience**

With Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™ and VMware® Horizon View™, t76L can provide a rich, efficient, and "local" computing experience for remote users.

▶ **Easy management and maintenance**

Since all computing tasks are mainly performed on a server, all hardware and software issues are significantly reduced on the client side. All user management, software installations, system management, and upgrades are done on a single server.



Atrust t76L

System	
Processor	Intel® Braswell Quad Core X5-E8000 1.04G (Burst to 2.0G)
Memory	
System memory	2GB (Manufacturing option: 4GB)
Flash memory	8GB
Graphics	
Maximum resolutions	Up to 2560 x 1600@60Hz, 3840 x 2160@30Hz
I/O Interfaces	
I/O ports	Front: 2 x USB 2.0, 1 x Audio out, 1 x Microphone port, Rear: 1 x USB 2.0, 1 x USB 3.2 Gen 1, 2 x HDMI, 1 x RJ-45, 1 x DC IN, 1 x Kensington lock slot
Networking	
Ethernet	10/100/1000Mb
Dimensions / Weight	
Dimensions	(W) 135 x (D) 93 x (H) 29 mm
Weight	294 g (approximate)
Environment	
Cooling	Fanless
Operating noise	No noise
Operating temperature	0°C ~ 35°C
Non-operating temperature	-20°C ~ 60°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95%
AC Adaptor	
Operating voltage range	100 ~ 240 VAC
Rated line frequency	50 ~ 60 Hz
Rated output current (max)	3A
Output voltage	+5V DC
Software	
Operating system	Atrust Linux
Management	Atrust Device Manager (ADM) / Atrust Client Setup (ACS)
Protocols	Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™, VMware® Horizon View™
Regulatory	CB, NRTL, FCC, CE, VCCI, BSMI
Options	VESA Mount

©2020 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. Citrix and ICA/HDX are trademarks of Citrix Systems, Inc.. VMware and Horizon View are trademarks of VMware, Inc.. To learn more, visit www.atrustcorp.com.